



Power of RFID

Smart Network I/O Device

ANI-522-2-2

Features

- Network and General Purpose Digital I/O Add-On to CSR-522QR
- 2 Input and 2 Output Ports
- Communication Interface – TCP
- User Friendly Configuration Tool
- Enable Autonomous Operation
- Easy to configure for Event Trigger reading




ANI-522-2-2

Specifications

ANI-522-2-2	
Power Requirement	+5 VDC
Communications Interface	RJ-45 Wi-Fi
Control Port	2 Input 2 Output
Expansion Port	2 I2C RS-232
LEDs	4 Mode LED 4 Antenna LED 1 Status LED
Temperature	-20°C to 65°C (-4°F to 149°F)
Environment	Indoor
Weight	



I/O Wiring Example

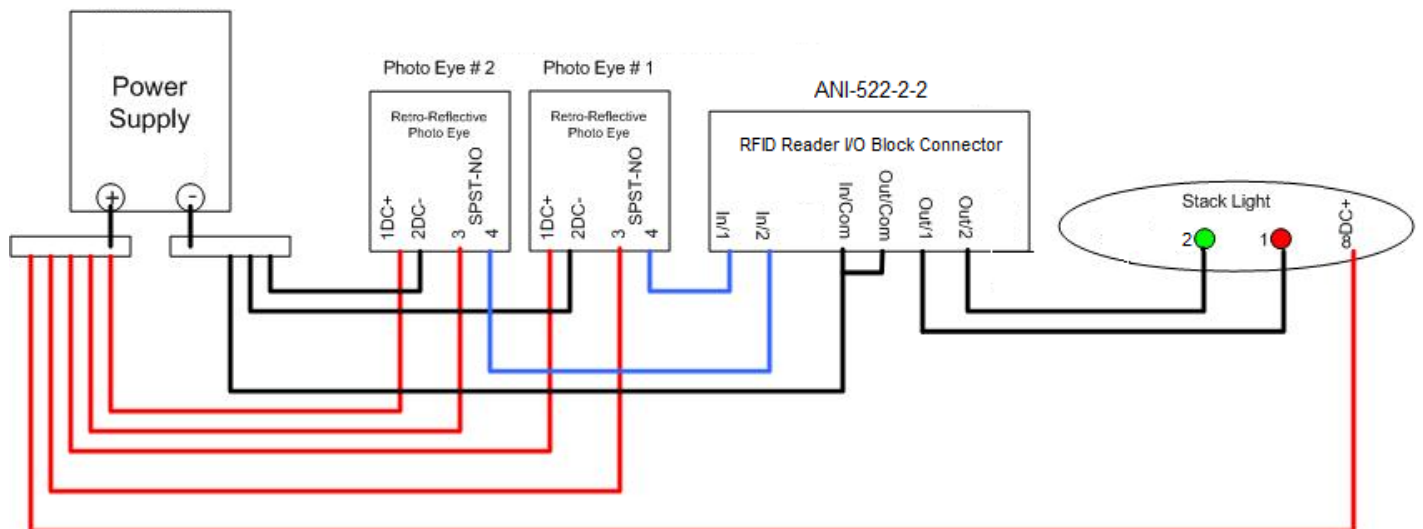

AWID

18300 Sutter Blvd., Morgan Hill, CA 95037
Tel: (408) 825-1100 Fax: (408) 782-7402
<http://www.awid.com>